



MDV31/39

DIRECT VENT MULTI-SIDED SEE-THROUGH FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

This unit illustrated is a MDVR31N Multi-Sided Direct Vent Fireplace in natural gas, LOGC31 Log Set – Seven Piece Cast Split Oak, M30SK See Through Kit, Z36CVCK Designer Clean View Circulating Kit (2).



MDV31/39

DIRECT VENT MULTI-SIDED PENINSULA FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

This unit illustrated is a MDVR31N Multi-Sided Direct Vent Fireplace in natural gas, LOGC31 Log Set – Seven Piece Cast Split Oak, M30PK Peninsula Kit, MGPKBL Grill Kit – Black, and optional MDV38RLE Refractory Liner.

Model	MDVL31N MDVR31N	MDVL39N MDVR39N	MDVL31LP MDVR31LP
Fuel	Natural	Natural	Propane
Input Max.	30,000 BTU	39,000 BTU	30,000 BTU
Input Min.	22,500 BTU	26,000 BTU	25,000 BTU
Glass Type	Tempered	Ceramic	Tempered
Certification	Decorative	Decorative	Decorative
Bedroom- Approved FE (P.4.1-02)	*Yes 57.7%	*Yes 56.6%	*Yes 54.7%

There's nothing like the magic of fire to add comfort and beauty to not just one room – but two! Discover its stylish appeal that is perfectly suited as a divider in large multi-purpose rooms such as a great room or lower level.

*Must be installed with listed thermostat, in Canada

STANDARD FEATURES*

- Hi/low Millivolt or IPI valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- A triple burner with seven piece cast split oak log set with glowing ember bed and decorative ash bed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Grills

Available in Black, or Classic Series Black with Polish Brass, Antique or Chrome Accents

Surrounds Wide (See Through Louvered only)

Antique, Polish Brass, Chrome and Black

Fan Kit

Thermostatically controlled for automatic On/Off operation and variable speed control

Brick Refractory Liners

End Panel.

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control




Designer Clean View Circulating Kit

No louvers required

Two Clean views required for installation

Clean View Framing

42 1/2" H x 46 1/8" W x 25 5/8" D

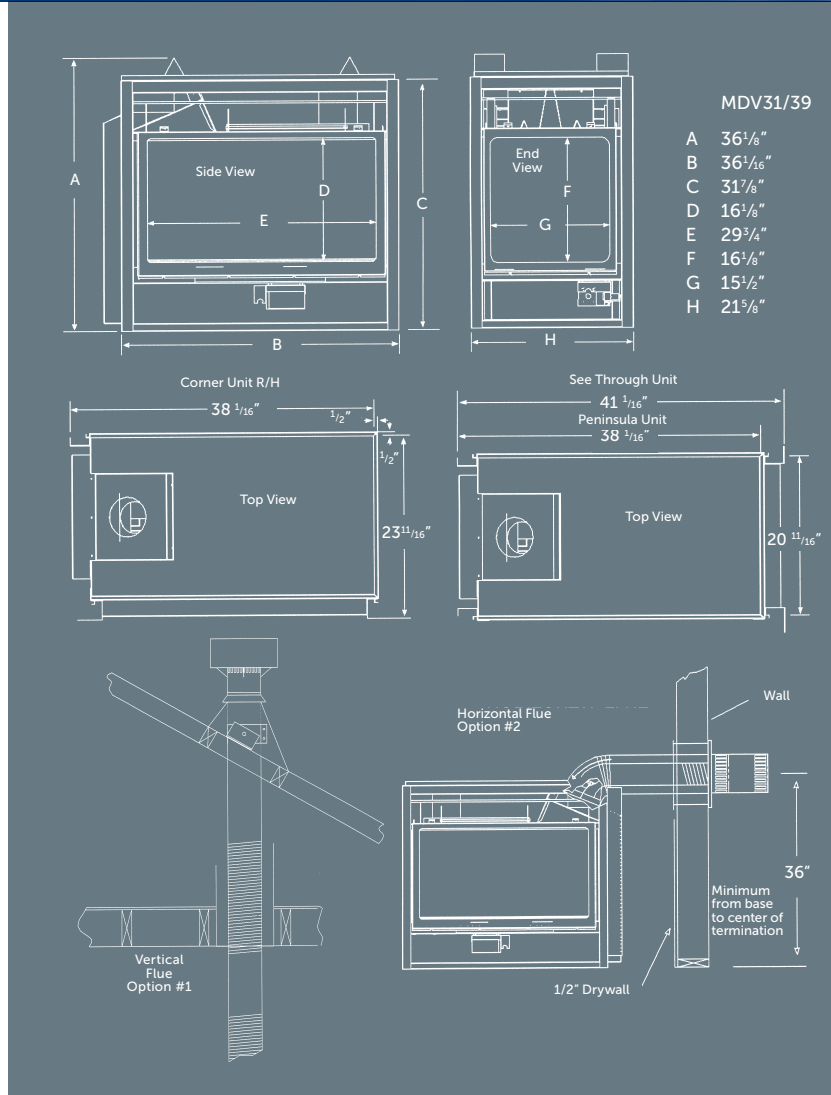

UNIT AND FRAMING SPECIFICATIONS (IN.)

Louvered Model	Height Framing	Width Framing	Depth Framing
CORNER	37"	38 1/8"	23 3/4"
PENINSULA	37"	38 1/8"	20 5/8"
SEE-THROUGH	37"	41 1/8"	20 5/8"

Minimum 42" height for combustible enclosure, with insulation sleeve.

* All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier.



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

MDV31/39

DIRECT VENT MULTI-SIDED CORNER FIREPLACE



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.
Certification: The models are certified for USA and Canada. Certified to: ANSI Z21.50-2014, CSA 2.22-2014, CGA 2.17-M91 (R2009) as a Vented Gas Fireplace.